



AMERICAN INDUCTION TECHNOLOGIES

GARAGE LIGHT



Model No.: LC-H511-80W

Application


Ideal for 80W Induction system. Patented IC Generator and lamp rated for 100,000 hours life. Applications include garages, parking areas, entrances, walkways, underpasses, loading docks and recreation areas.

Available in wide range of color temperatures from 2700 – 6500°K. Also available in 120V, 208V, 220V, 240V and 277V.

Specification Features


- UL Listed for wet locations
- White aluminum reflector is designed for maximum photometric efficiency and optimum light distribution
- Precision die-cast aluminum housing with powder coated finish
- Comes with high impact polycarbonate lens

Engineering Dimensions

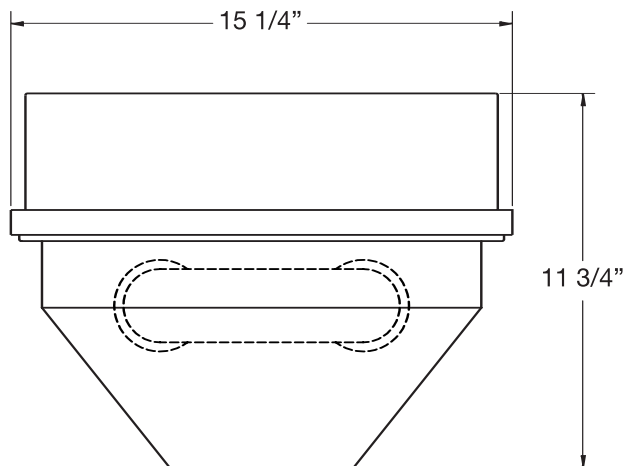

Photometric Information

POLAR GRAPH

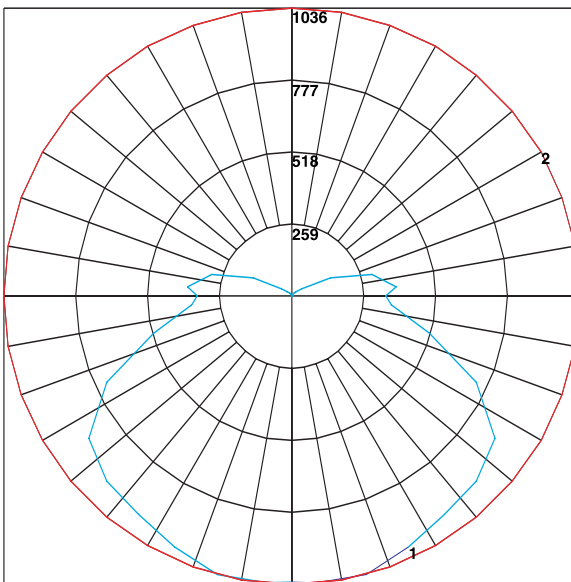

Maximum Candela = 1036 Located At Horizontal Angle = 0, Vertical Angle = 15
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.) : BLUE
2 - Horizontal Cone Through Vertical Angle (15) (Through Max. Cd.) : RED

Calculations based on published IES Methods and recommendations.
Tested in accordance with IES procedures by Light Laboratory, Inc.

