



AMERICAN INDUCTION TECHNOLOGIES

WALLPACK FIXTURE


Application

Ideal for 80W Induction system. Patented IC Generator and lamp rated for 100,000 hours life. Applications include garages, parking areas, entrances, walkways, underpasses, loading docks and recreation areas.

Available with motion sensor or photocell. Available in wide range of color temperatures from 2700 – 6500°K. Also available in 120V, 208V, 220V, 240V and 277V.


Specification Features

- UL Listed for wet locations
- Aluminum reflector is designed for maximum photometric efficiency and optimum light distribution
- Precision die-cast aluminum housing with powder coated finish
- Comes with high impact glass lens

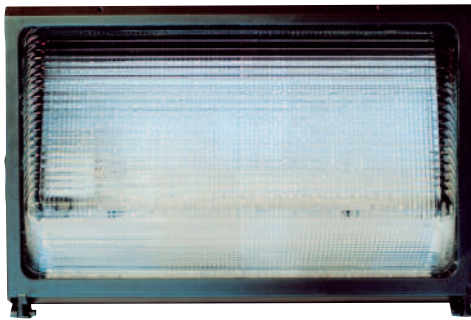


Model No.: LC-H506-80W

Engineering Dimensions

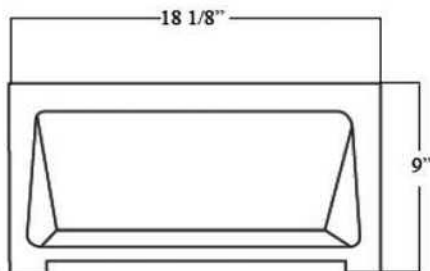


FRONT VIEW



Photometric Information

POLAR GRAPH

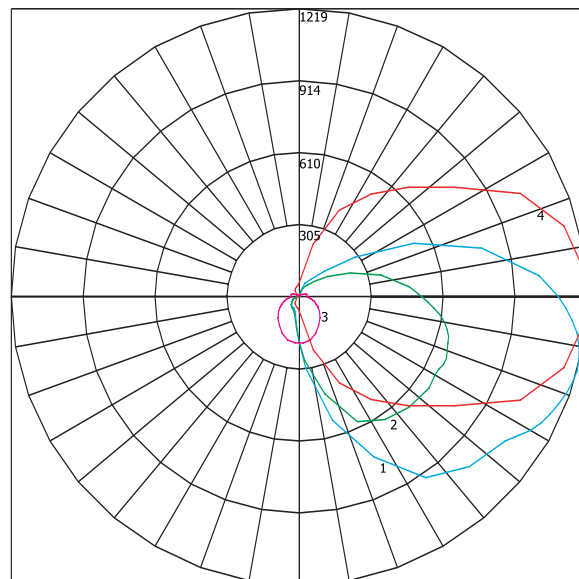

Maximum Candela = 1219 Located At Horizontal Angle = 0, Vertical Angle = 75
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.): BLUE
2 - Vertical Plane Through Horizontal Angles (45 - 225) : GREEN
3 - Vertical Plane Through Horizontal Angles (90 - 270) : MAGENTA
4 - Horizontal Cone Through Vertical Angle (75) (Through Max. Cd.): RED

Calculations based on published IES Methods and recommendations.
Tested in accordance with IES procedures by Light Laboratory, Inc.

DESIGNED & ASSEMBLED IN USA

www.americaninduction.com



2750 E. Regal Park Dr. • Anaheim, CA 92806, USA
1.866-611.2484 Toll Free • 1.714.630.8511 Tel • 1.866.611.2485 Fax

All information deemed reliable but not guaranteed. © Copyright 2007 American Induction Technologies, Inc. All rights reserved.